

# Genset Data Sheet 1

	Prime	Standby
Genset model	AJ220P	AJ220S
380-415V, 50Hz	200.0 kVA 160.0 kW	220.0 kVA 176.0 kW
440-480V, 60Hz	203.7 kVA 163.0 kW	225.0 kVA 180.0 kW

Ratings at 0.8 pf

## Prime

This rating is for the supply of continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation on the annual hours of operation and 10% overload power can be supplied for one hour in twelve hours.

## Standby

This rating is for the supply of continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted.

Engine model	SisuDiesel	634 DSRAG	
Number of cylinders		6 in-line	
Cubic capacity	litre (cu inch)	7.40 (451.6)	
Aspiration		Turbocharged	
Alternator	Newage	Stamford	
Frequency	Hz	50	60
Engine speed	rpm	1,500	1,800
Fuel tank capacity	litre (USgal)	400 (105)	400 (105)
Fuel consumption at full rating:			
Prime	litre /h (USgal /h)	44.1 (11.7)	48.0 (12.7)
Standby	litre /h (USgal /h)	47.9 (12.7)	52.4 (13.8)
Heat rejection to exhaust system (max)	kW (BTU /min)	165 (9,370)	189 (10,738)
Heat rejection to cooling system (max)	kW (BTU /min)	102.0 (5,811)	112.0 (6,353)
Total radiated heat (max)	kW (BTU /min)	19.0 (1,107)	21.0 (1,210)
Exhaust temperature (max)	deg C (deg F)	565 (1,049)	535 (995)
Radiator cooling air flow	cu m /min (cfm)	307 (10,825)	530 (18,710)
with max restriction	mm (inch) H <sub>2</sub> O	20.0 (0.80)	20.0 (0.80)
Combustion air flow (max)	cu m /min (cfm)	12.5 (441)	15.1 (533)
Exhaust gas flow (max)	cu m /min (cfm)	36.7 (1,296)	42.8 (1,511)
with max allowable back pressure	mm (inch) H <sub>2</sub> O	800 (31.5)	800 (31.5)



## Diesel Compact Three phase AJ220

Note: Standard reference conditions: 25deg C (77deg F) air inlet temperature, 152.4m (500feet) above sea level, 60% relative humidity. All engine performance data based on the above mentioned maximum continuous ratings. Fuel consumption data at full load for diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, class A2.

Genset photograph may include optional extras

# Genset Data Sheet 2

Genset model AJ220



## Dimensions:

Length (A)	mm (inch)	2,500 (98.4)
Width (B)	mm (inch)	1,000 (39.4)
Height (C)	mm (inch)	1,735 (68.3)
Total height of exhaust rain cap (D)	mm (inch)	Not applicable
Max horizontal projection of end door (E)	mm (inch)	Not applicable
Max horizontal projection of doors at each side (F)	mm (inch)	Not applicable


## Weights:

Dry weight (with lube oil)	kg (lb)	2,411 (5,315)
Wet weight (with lube oil and coolant)	kg (lb)	2,441 (5,381)

## Sound pressure levels:

		50Hz 1500rpm	60Hz 1800rpm
15m, 75% load	dB(A)	TBA	TBA
15m, 100% load	dB(A)	TBA	TBA
7m, 75% load	dB(A)	TBA	TBA
7m, 100% load	dB(A)	TBA	TBA
1m, 75% load	dB(A)	TBA	TBA
1m, 100% load	dB(A)	TBA	TBA

**Diesel  
Compact  
Three phase  
AJ220**

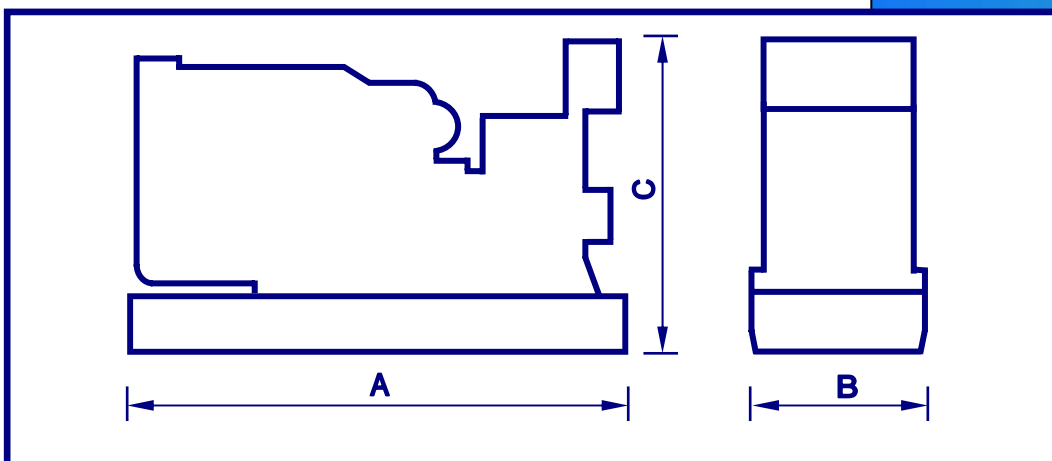

**AJ Power Limited**  
 1 Charlestown Drive, Carn Industrial Area, Craigavon, BT63 5GA  
 Northern Ireland, United Kingdom  
 Tel: +44 (0)28 3836 1000 Fax: +44 (0)28 3836 1010  
 Web: [www.ajpower.net](http://www.ajpower.net) E-mail: [sales@ajpower.net](mailto:sales@ajpower.net)

In line with our policy of continuous development, we reserve the right to change specification without notice

DN3 AJ220 041216-2