

# Genset Data Sheet 1

	Prime	Standby
Genset model	AJ400P	AJ400S
400V, 50Hz	350.0 kVA 280.0 kW	400.0 kVA 320.0 kW
440V, 60Hz	375.0 kVA 300.0 kW	418.0 kVA 335.0 kW

Ratings at 0.8 pf

## Prime

This rating is for the supply of continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation on the annual hours of operation and 10% overload power can be supplied for one hour in twelve hours.

## Standby

This rating is for the supply of continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted.

Engine model	Scania	DC12-59A (spec 10-32A) 6 in-line	
Number of cylinders			
Cubic capacity	litre (cu inch)	11.7 (714.0)	
Aspiration		Turbocharged	
Alternator	Newage	Stamford	
Frequency	Hz	50	60
Engine speed	rpm	1,500	1,800
Fuel tank capacity	litre (USgal)	1,000 (264)	1,000 (264)
Fuel consumption at full rating: Prime	litre /h (USgal /h)	71.5 (18.9)	77.4 (20.4)
Standby	litre /h (USgal /h)	82.5 (21.8)	86.1 (22.7)
Heat rejection to exhaust system (max)	kW (BTU /min)	248 (14,105)	262 (14,900)
Heat rejection to cooling system (max)	kW (BTU /min)	192.0 (10,920)	205.0 (11,660)
Total radiated heat (max)	kW (BTU /min)	Not applicable	Not applicable
Exhaust temperature (max)	deg C (deg F)	509 (949)	460 (860)
Radiator cooling air flow with max restriction	cu m /min (cfm) mm (inch) H <sub>2</sub> O	Not applicable	Not applicable
Combustion air flow (max)	cu m /min (cfm)	22.9 (808)	27.1 (958)
Exhaust gas flow (max) with max allowable back pressure	cu m /min (cfm) mm (inch) H <sub>2</sub> O	Not applicable	Not applicable



**Diesel  
Sound  
attenuated  
Three phase  
AJ400**

Note: Standard reference conditions: 25deg C (77deg F) air inlet temperature, 152.4m (500feet) above sea level, 60% relative humidity. All engine performance data based on the above mentioned maximum continuous ratings. Fuel consumption data at full load for diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, class A2.

Genset photograph may include optional extras

# Genset Data Sheet 2

Genset model AJ400



## Dimensions:

Length (A)	mm (inch)	4,750 (187.0)
Width (B)	mm (inch)	1,600 (63.0)
Height (C)	mm (inch)	2,095 (82.5)
Total height of exhaust rain cap (D)	mm (inch)	2,245 (88.4)
Max horizontal projection of end door (E)	mm (inch)	1,000 (39.4)
Max horizontal projection of doors at each side (F)	mm (inch)	1,105 (43.5)


## Weights:

Dry weight (with lube oil)	kg (lb)	4,550 (10,030)
Wet weight (with lube oil and coolant)	kg (lb)	4,600 (10,140)

## Sound pressure levels:

		50Hz 1500rpm	60Hz 1800rpm
15m, 75% load	dB(A)	65	67
15m, 100% load	dB(A)	66	69
7m, 75% load	dB(A)	71	73
7m, 100% load	dB(A)	72	75
1m, 75% load	dB(A)	80	84
1m, 100% load	dB(A)	81	85

**Diesel  
Sound  
attenuated  
Three phase  
AJ400**

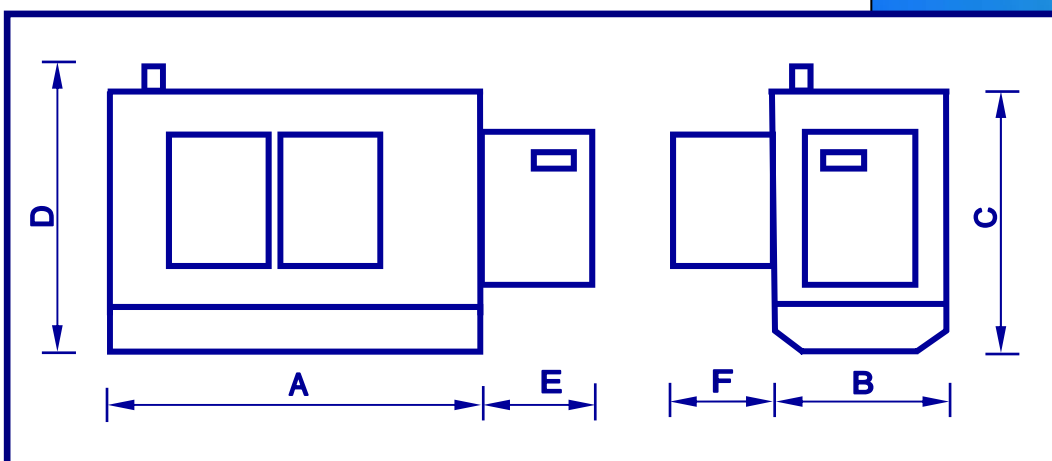

## AJ Power Limited

1 Charlestown Drive, Carn Industrial Area, Craigavon, BT63 5GA  
Northern Ireland, United Kingdom  
Tel: +44 (0)28 3836 1000 Fax: +44 (0)28 3836 1010  
Web: [www.ajpower.net](http://www.ajpower.net) E-mail: [sales@ajpower.net](mailto:sales@ajpower.net)

In line with our policy of continuous development, we reserve the right to change specification without notice

DA3 AJ400 080110-2